


WILLETT RG-6 COPPER COAXIAL CABLE

PACKING :

COIL PACKING : 200Mtrs/Box (100Mtrs+100Mtrs)

DRUM Packing : 305Mtrs/Drum

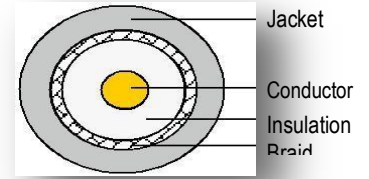

Structure Figure



Conductor

Material

1.02MM Copper Wire

Construction

40/128

Insulation

Material

Low-density polyethylene foam

Braiding/Netting

Material

Alloy

Construction

No. of Braiding : 128
Diameter : .15

Jacket

Material

VIRGIN PVC

Diameter

6MM OD



COAXIAL CABLE : RG6 90% COPPER

Physical Dimensions	Standard Shield (mm)	Attenuation @20c	
		Frequency	Max.dB/100mtr
Copper Inner Conductor	0.91	5	1.97
Dielectric	4.57	50	5.00
First Shield (APA Tape)	4.79	100	6.00
Diameter Over Jacket	6.91	200	9.77
Alloy Braid	128*0.16	450	14.10
Cable weight (kg/km)	41	500	14.85
		550	15.77
		860	20.00
		1000	21.75